

## PERFORMANCE DATA – InfraCOOL™ MIST GREEN vs Mist Green

### KEY FACTS : HEAT REFLECTIVE COATINGS

- Due to their large surface area and exposure, Roof Surfaces capture enormous amounts of the sun's energy and thus COOL ROOFS offer potential energy savings of 10-30%\*, resulting in direct cost and green house gas emission savings
- Dulux® InfraCOOL™ technology works by maximising the TOTAL SOLAR REFLECTION including the (invisible) infra-red portion of the sun's energy which accounts for over 50% of the sun's total light energy
- Various internationally accepted verification methods demonstrate the direct benefits of InfraCool technology in comparative testing vs comparable std colour and/or surface materials

### ASTM E1980-01 : SOLAR REFLECTANCE INDEX

The following comparative test data (based on constant solar conditions) demonstrates the calculated surface temperature cooling benefit using Dulux® InfraCOOL™ technology against the nominated system.

**Total Solar Reflectance**      % TSR    ASTM E903 or C1549  
*Reflectance of the sun's energy across the broad solar spectrum including*

- visible region, defining the colour we see
- non visible region, mainly Infra-red (approx 50% of Total Sun's rays)

**Thermal Emittance**                      0-1 scale, ASTM C1371  
*The ability of a material to release (ie. emit) captured heat energy*

**Solar Reflectance Index**                      relevant to wind conditions

**Surface Temperature**                      constant air temperature : 37C  
 constant Solar flux : 1000 W/m2

**InfraCOOL™ effect**                      potential surface temp. COOLING

Std MistGreen			Dulux® AcraTex® COOL ROOF MISTGREEN		
21.7 %			42.3%		
0.85			0.90		
Wind condition...			low	medium	high
17.17	18.96	20.55	47.82	48.23	48.60
94	75	57	77	64	51

**17°C COOLER**  
 low wind conditions


### ASTM E903 : SOLAR ABSORBANCE

TSR and Spectral Reflectance is tested in accordance with ASTM E-903.

% Reflectance of 2 visually equal panels reported at individual wavelengths from 200-2500 nanometers.

Results:

- ❖ Matching reflectance (intersecting lines) in the visible light region confirm the colours are close visual matches.
- ❖ Significantly higher reflectance of InfraCool across the infrared region (separation of the lines above 700 nm).
- ❖ TSR (Total Solar Reflectance) increased from 21.7% to 42.3% (95% increase) with InfraCool™ Technology.

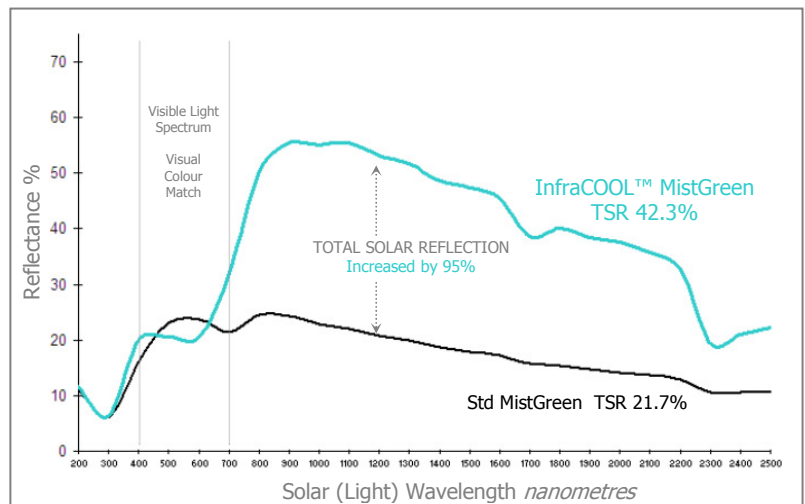

### COLOUR CLASSIFICATIONS :

Solar Absorbance (SA)	
Std (SA)	InfraCOOL™ (SA)
0.577	0.783

Building Code of Australia (BCA) Classification		
Criteria (SA)	STD rating	InfraCOOL™ rating
Light : <0.55 Dark : >0.55	DARK	DARK

NSW Building & Sustainability Index (BASIX) Classification		
Criteria (SA)	STD rating	InfraCOOL™ rating
Light: <0.475 Medium: 0.475-0.70 Dark : >0.70	DARK	MEDIUM

❖ Energy saving potential based on Field Study of 2 identical buildings with constant state air-conditioning. High reflectance white coating vs original dark roofing surface  
 Technical Report : ICMistGreen-01

InfraCOOL™...Colours that shield from the sun